



Single Buck Press

Model 827SB



- Production rate indicator
- Easily adjustable time cycles
- Color touch screen control panel
- Water spray and mirror standard
- Self-diagnostics from touch screen
- Super-heated air finishes yoke and sides
- Soft-air smooths out wrinkles before pressing
- Blower automatically turns off when not in use
- Designed to finish wide range of sizes and styles
- Flat heads for better finish; vacuum buck for smooth fronts

www.forentausa.com
Tel: 423-586-5370 • Email: info@forentausa.com



Made in USA

Specifications

Model 827SB


| | |
|---|--|
| Electrical connections | 827SB |
| 208-240V 3PH 50/60Hz 18.8-17.8 Amps 4kW | standard |
| 380-415 / 460V 3PH 50/60Hz 11.5-11.1 / 10.7 Amps 4kW | optional |
| 380-415 / 460V 3PH 50/60Hz 13.7 Amps 4kW, with 240V Neutral wire | optional |
| Steam and air connections | |
| Steam inlet | NPT 1/2" |
| Steam outlet (total of 2 outlets) | NPT 1/2" |
| Recommended steam pressure | PSIG 115-125 KPa 793-862 |
| Steam consumption @ 125 psig (862 kPa) | lb/hr 51.8 kg/hr 23.4 BHP 1.5 |
| Compressed air | NPT 3/8" |
| Air consumption/shirt | free air/cycle @ 85 psig free air/cycle @ 586 kPa |
| Recommended air pressure | PSIG 85 KPa 586 |
| Water connection (for water spray) | NPT 1/4" |
| Weight (crated) | |
| Shipping | lbs 1370 kg 621 |

- 1 Steam connection
- 2 Steam outlets
- 3 Control panel
- 4 Air connection
- 5 Electrical connection
- 6 Water connection (For water spray)



BODY BUCK DIMENSIONS

TOP VIEW

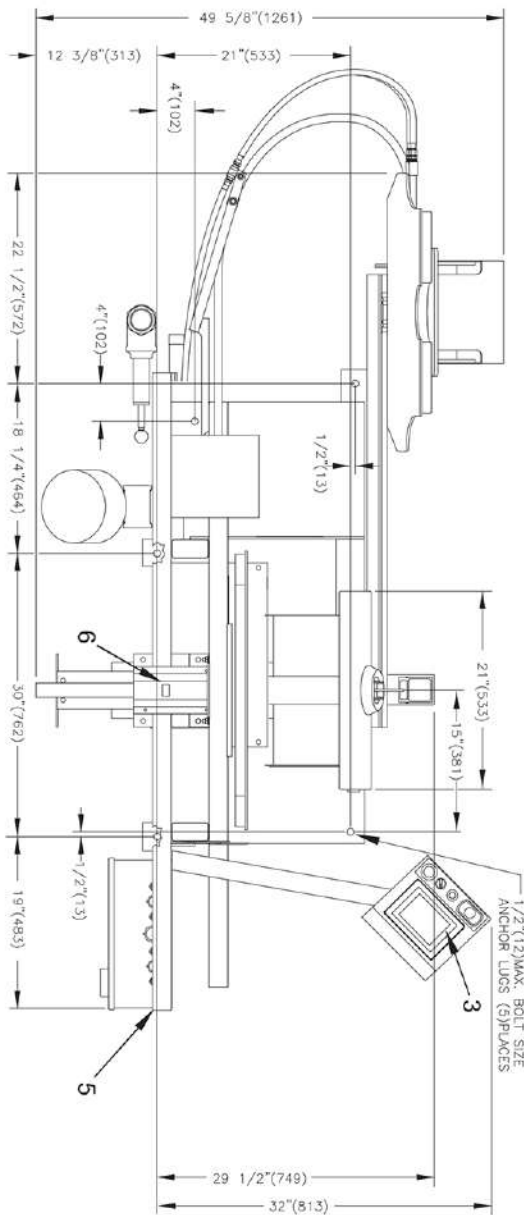

Detail Line Drawing

(millimeters shown in parentheses)

REAR VIEW

