



Small Laundry Presses "VS" Series

Models: 19VSB/3516VSB/27VSB/32VSB/38VSB/450VSB

Models: 19VST/3516VST/27VST/32VST/38VST/450VST



Model 19VSB • Bar Activated



Model 3516VST • Two Button Activated

- Fast head closing for maximum operator efficiency
- Most models available steam or electrically-heated
- Models 32VSB and 27VSB designed for shirt finishing
- Multiple buck sizes and configurations to choose from
- Available in either bar or two button activated closing system
 - Timer included in all two-hand activated presses
- Patented mechanism provides reliable service at minimal operating costs
 - Options include Iron Tray Attachment, Water Spray and Electric Timer

Forenta's small laundry presses have long been considered the industry standard for speed and efficiency. Available in both steam or electrically-heated models, these presses are offered in multiple buck sizes and with various options. This patented, time-tested design provides simplicity and reliability and is backed by one of the best warranties in the industry.

www.forentausa.com

Tel: 423-586-5370

Email: forenta@forentausa.com

Made in USA

"VS" SERIES SPECIFICATIONS

Steam connections:

- 1/2 NPT for supply and condensate
- 100-125 psi (0.69-0.86 MPa)
- Steam consumption at 100 psi(0.69 MPa):
- 0.75 BHP(26 lb/hr)(11.7 kg/hr)

Compressed air connection:

- 3/8 NPT
- Recommended Air Pressure: 70 psi (0.48 MPa)
- Free air/cycle at 68 psi (0.47 MPa): 0.23 cubic feet (6.5 liters)

Electrical Controls connection (VST & VSTE Models):

- 100-240 VAC single-phase, 50/60 Hz, 0.5 amp
- IEC 60320 C13 socket

Electrical Heating connection: (19VSBE & 19VSTE)

- 230 VAC single-phase, 50/60 Hz, 1600watts
- Approx. Consumption/Hour 0.8 KWH

Electrical Heating connection: (27VSBE & 27VSTE)

- 230 VAC single-phase, 50/60 Hz, 2650watts
- Approx. Consumption/Hour 1.35 KWH

Electrical Heating connection: (32VSBE & 32VSTE)

- 230 VAC single-phase, 50/60 Hz, 2975watts
- Approx. Consumption/Hour 0.8 KWH

Electrical Heating connection: (450VSBE & 450VSTE)

- 230 VAC single-phase, 50/60 Hz, 4800watts
- Approx. Consumption/Hour 2.4 KWH

Optional hand iron electrical connection (external wiring, not part of press internal wiring):

- 115 VAC or 230 VAC single-phase, 50/60 Hz
- 800 watts
- Approximate hourly consumption: 0.5 KWH

Optional Timer Kit electrical connection for "(VSB & VSBE Models):

- 100-240 VAC single-phase, 50/60 Hz, 0.5 amp
- IEC 60320 C13 socket for press controls

Optional water spray cold water connection:

- 1/4 NPT
- 40-80 psi (0.3-0.55 MPa)
- 1 gallon/minute (3.8 liter/minute)


Optional Attachment Kits

K-732-1	Steam/Electric Iron Attachment, 115 Volt
K-732-2	Steam/Electric Iron Attachment, 230 Volt
K-733	All-Steam Iron Attachment
K-731	Water Spray
K-726-1	115 Volt Timer Kit for "VSB" & "VSBE" models
K-726-2	230 Volt Timer Kit for "VSB" & "VSBE" models
K-240	Corner Table

BUCK DIMENSIONS (unpadded)


19

Mushroom
Topper

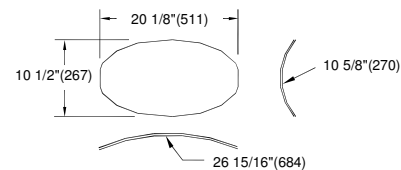


3516

Double
Topper

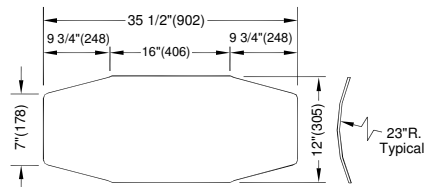


27

Bantam
Collar-Cuff

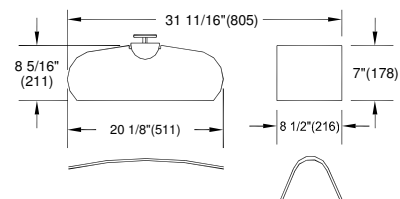


32

Bantam
Body



450

Double
Sleever

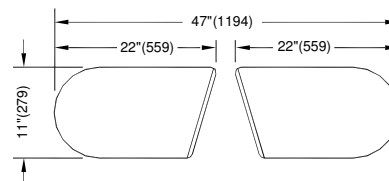

38

Apparel/
Sleeve

