




Single Buck Press with Sleeve Pleaters

Model 822SBSP

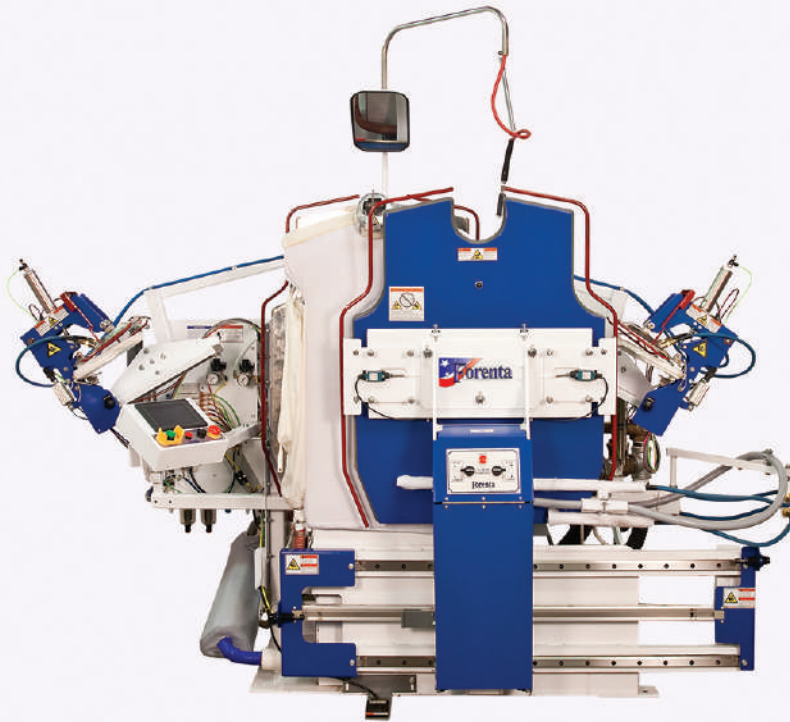

- Production rate indicator
- Easily adjustable time cycles
- Color touch screen control panel
- Water spray and mirror standard
- Self-diagnostics from touch screen
- Super-heated air finishes yoke and sides
- Blower automatically turns off when not in use
- Designed to finish wide range of sizes and styles
- Sleeve pleaters turn on or off with touch screen
- Flat heads for better finish; vacuum buck for smooth fronts
- Stationary buck - shirt is completely dressed from one position
- Multi-position sleeve height adjustment with auto angle orientation

www.forentausa.com



Tel: 423-586-5370 • Email: info@forentausa.com

Made in USA

Specifications


Model 822SSBSP

Electrical connections	822SSBSP
208-240V 3PH 50/60Hz 30.8-29.8 Amps 5.5kW	standard
360-415 / 460V 3PH 50/60Hz 18.5-18.1 / 17.7 Amps 5.5 kW	optional
380-415 / 460V 3PH 50/60Hz 20.7 Amps 5.5 kW, with/240V Neutral wire	optional
Steam and air connections	
Steam inlet	NPT 1/2"
Steam outlet (total of 4 outlets)	NPT 1/2"
Recommended steam pressure	PSIG 115-125 KPa 793-862
Steam consumption @ 125 psig (862 kPa)	lb/hr 86 kg/hr 39 BHP 2.5
Compressed air	NPT 3/8"
Air consumption/shirt	free air/cycle @ 85 psig free air/cycle @ 586 kPa
Recommended air pressure	PSIG 85 KPa 586
Water connection (for water spray)	NPT 1/4"
Weight (crated)	lbs 1690 kg 767
Shipping	
1 Steam connection 2 Steam outlets 3 Control panel	4 Air connection 5 Electrical connection 6 Water connection(For water spray)



BODY BUCK DIMENSIONS

TOP VIEW

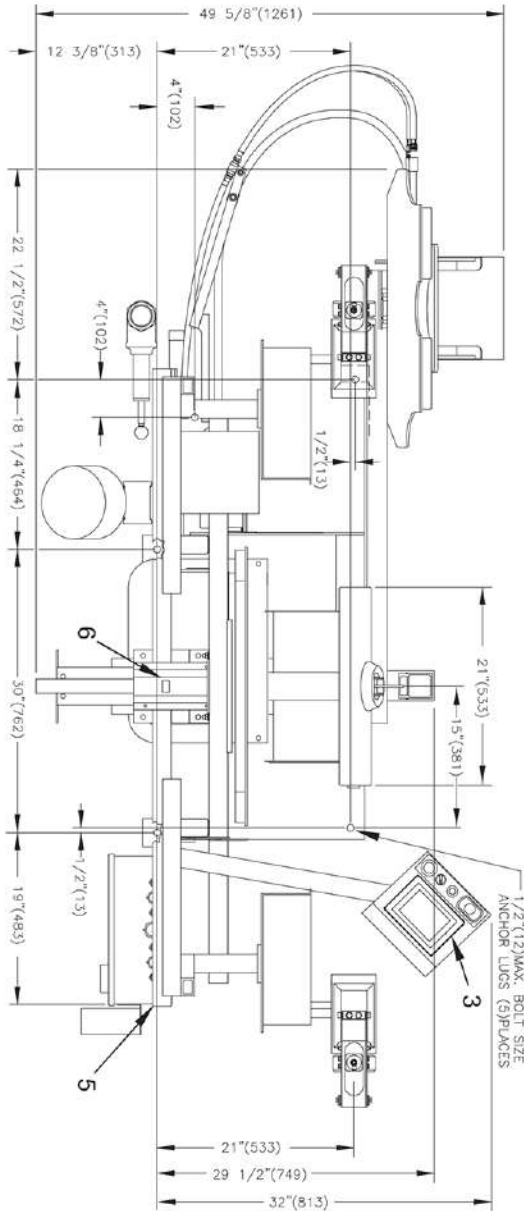

Detail Line Drawing
(millimeters shown in parentheses)

REAR VIEW

