




SUPERSHINE

.....ONE STOP SOLUTION FOR ALL LAUNDRY NEEDS


DRYING TUMBLER

SUPERSHINE Drying Tumbler, front loading type, open pocket having Stainless Steel inner basket. Automatic features - auto timed, auto reverse, auto temperature control with solenoid valves. (In Steam heated model). Highly energy efficient with double walled glass-wool insulation and lint screen. Two Separate motors for drive and suction blower. Ideal solution to drying needs. Easy to operate and maintain. All the operations and maintenance is done from front and rear of the machine. Tumblers can be installed without any spacing in between. This reduces heat losses due to radiation. Unique design without gear box saves lot of space and energy. Specially designed powerful suction blower and lint screen offers constant high air flow cycle.

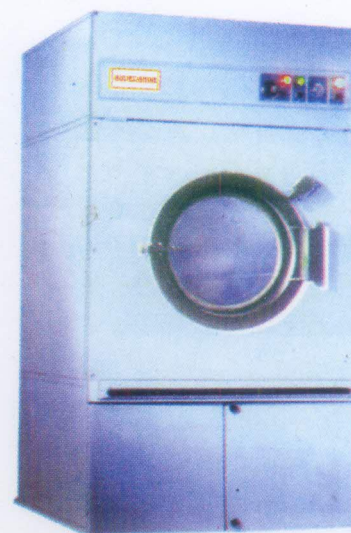

MODEL	CAPACITY	BASKET SIZE	DRIVE MOTOR	BLOWER MOTOR	DOOR OPENING	HEATING		EXHAUST SIZE	OVERALL DIMENSIONS W X D X H	APPROX. WT.
						STEAM CONSUMPTION & CONNECTION	ELECTRICAL			
SDT / 15 / S	15 KG.	800 X 600	0.5 H.P. 48 RPM	0.5 H.P.	550	20 KG / HR 15	----	175	900 X 1225 X 1750	280 K.G.
SDT / 15 / E	15 KG.	800 X 600	0.5 H.P. 48 RPM.	0.5 H.P.	550	----	8/12 K.W.	175	900 X 1225 X 1750	280 K.G.
SDT / 30 / S	30 KG.	950 X 950	1 H.P. 45 RPM	1 H.P.	650	40 KG / HR 15	----	225	1060 X 1570 X 1980	575 K.G.
SDT / 30 / E	30 KG.	950 X 950	1 H.P. 45 RPM	1 H.P.	650	----	18/24 K.W.	225	1060 X 1570 X 1980	575 K.G.
SDT / 60 / S	60 KG.	1250 X 990	2 H.P. 36 RPM	2 H.P.	800	80 KG / HR 15	----	300	1360 X 1700 X 2300	860 K.G.
SDT / 60 / E	60 KG.	1250 X 990	2 H.P. 36 RPM	2 H.P.	800	----	36/48 K.W.	300	1360 X 1700 X 2300	860 K.G.
SDT / 120 / S	120 KG.	1600 X 1200	3 H.P. 35 RPM.	2 H.P. X 2	1000	150 KG / HR 25	----	300 X 2	1760 X 2190 X 2760	1750 K.G.

ALL DIMENSIONS ARE IN MM. STANDARD MACHINES OPERATE ON 415 V $\pm$ 10% 3 PHASE, 50 HZ AC ELECTRIC SUPPLY. SPECIFICATIONS MENTIONED ABOVE ARE SUBJECT TO CHANGE WITHOUT NOTICE

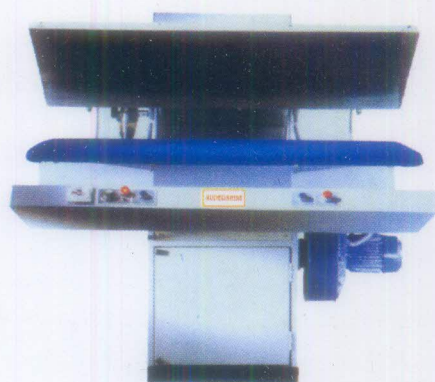

FLAT BED PRESS

SUPERSHINE Flat Bed Press, automatic - with auto time release, auto temperature control, powerful moisture suction, pneumatic raising and lowering, spring suspended head with adjustable pressure. Suitable for Ironing of linen, uniform, home furnishing and personal garments. Uniform temperature and pressure available on the Ironing bed. Auto timed release, checks over drying. Offers maximum safety to operators.

MODEL	HEAD AND BUCK SIZE	SUCTION BLOWER CAPACITY	HEATING		AIR CONNECTION AIR CONSUMPTION AIR PRISSURE	OVERALL DIMENSIONS W X D X H	APPROX. WT.
			STEAM CONNECTION & CONSUMPTION	ELECTRICAL			
SFB / 30 / S	1500 X 750	1 H.P. 350 LTR / SEC (850 CFM)	15 30 KG / HR	----	15 90 LTR / MIN. 6 KG./CM ²	1600 X 1570 X 1280	570 KG.
SFB / 30 / E	1500 X 750	1 H.P. 350 LTR / SEC (850 CFM)	----	18 K.W.	15 90 LTR / MIN. 6 KG./CM ²	1600 X 1570 X 1280	570 KG.

ALL DIMENSIONS ARE IN MM. STANDARD MACHINES OPERATE ON 415 V $\pm$ 10% 3 PHASE, 50 HZ AC ELECTRIC SUPPLY. SPECIFICATIONS MENTIONED ABOVE ARE SUBJECT TO CHANGE WITHOUT NOTICE