



## Cabinet Sleeve Presses

Model 905HSA (Contoured Heads)

Model 910SAB (Flat Heads)



905HSA



910SAB

- Finish both short and long sleeves
- Foot activation for side-drying air bags
- Model 910SAB pairs with 802DBV body press
- Model 905HSA pairs with 620DBV body press
- Measuring light adjusts sleeves to proper height
- Cabinet Sleeve Presses finish a wide range of shirt sizes
- Bucks designed with padded buck plates and inflatable air bags

[www.forentausa.com](http://www.forentausa.com)

Tel: 423-586-5370 • Email: [info@forentausa.com](mailto:info@forentausa.com)


Made in USA

# Specifications

Models 905HSA, 910SAB

Electrical connections		905HSA	910SAB
120V 1PH 50/60Hz .5AMPS		×	—
230V 1PH 50/60Hz .25AMPS		optional	—
208-230V 3PH 60Hz 16A 3.7KW		—	×
220V 3PH 50Hz 16A 3.2KW		—	optional
Steam and Air connection			
Steam Inlet	NPT	1/2"	1/2"
Steam Outlet	NPT	1/2"	1/2"
Rec. steam pressure	PSIG kPa	100-125 689-862	100-125 689-862
Steam consumption	BHP kg/hr	2 31.8	2 31.8
Compressed air	NPT	3/8"	3/8"
Air consumption(per shirt)	free air/cycle at 85psig free air/cycle at 586kPa	1.7 ft <sup>3</sup> 47 ℓ	1.3 ft <sup>3</sup> 34 ℓ
Rec. air pressure	PSIG kPa	85 586	85 586
Weight (crated)			
Shipping	lbs kg	875 397	1075 488

- 1 Steam connection
- 2 Air connection
- 3 Steam Outlet connection
- 4 Electrical connection ~for 905HSA only
- 5 Electrical connection ~for 910SAB only

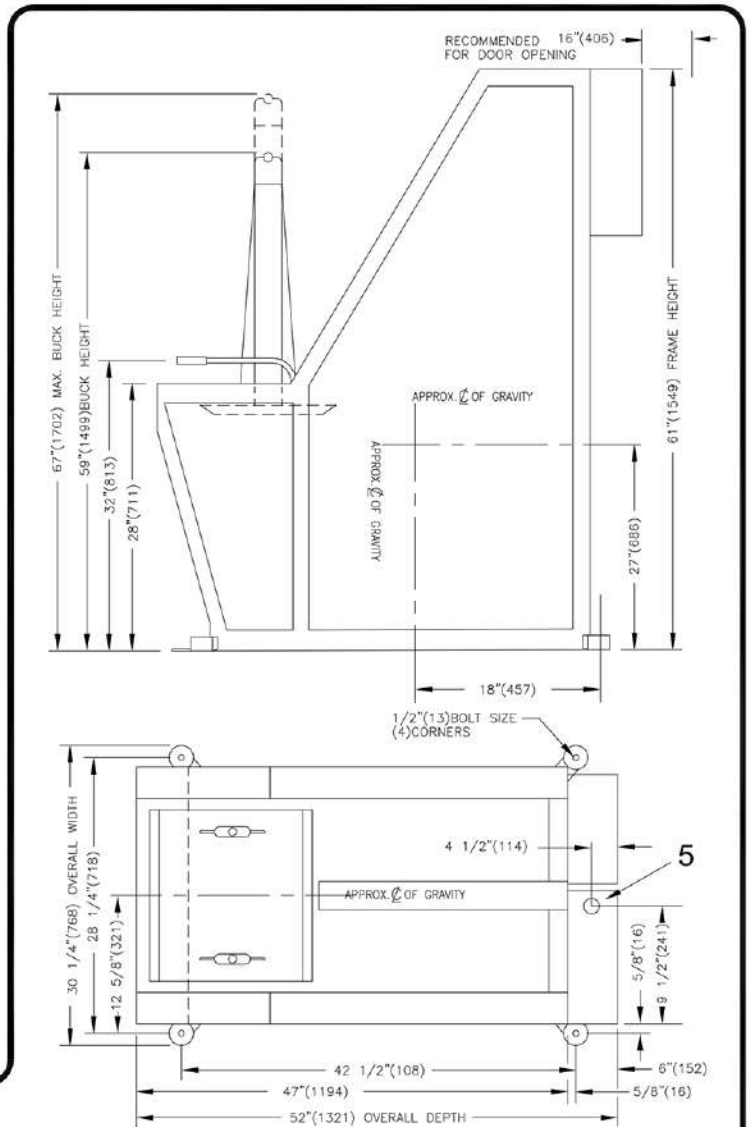

## Detail Line Drawing (millimeters shown in parentheses)

